


模组型号及相关参数选型表

TLS11-□1-L□□□-□-□-□-□

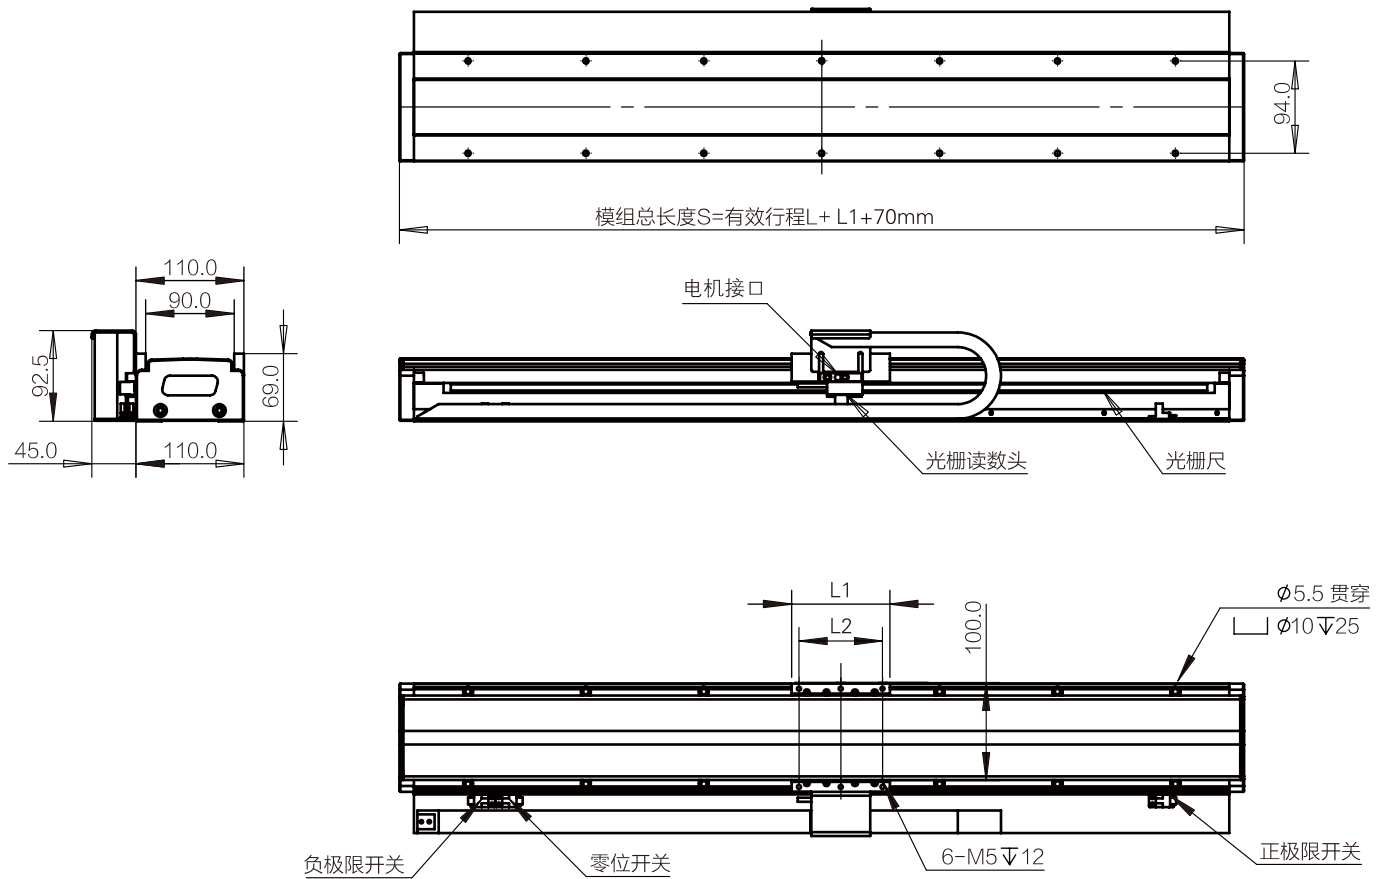

不同电机类型对应的相关参数介绍

电机类型 \ 长度 (mm)	L1	L2
A1	100	85
B1	186	154
C1	268	238

模组型号及相关参数选型表

TLS11-□1-L □ □ □ - □ - □ - □ - □

行程 m m 项目	A1	72	120	168	216	264	312	360	408	456	504	552	600	648	696	744	792	840
	B1	82	130	178	226	274	322	370	418	466	514	562	610	658	706	754		
	C1	96	144	192	240	288	336	384	432	480	528	576	624	672				
持续 推力 (N)	A1	46																
	B1	86																
	C1	129																
峰值 推力 (N)	A1	151																
	B1	305																
	C1	453																
最大 负载 (kg)	A1	8																
	B1	15																
	C1	25																
全长 (mm)	A1	242	290	338	386	434	482	530	578	626	674	722	770	818	866	914	962	1010
	B1	338	386	434	482	530	578	626	674	722	770	818	866	914	962	1010		
	C1	434	482	530	578	626	674	722	770	818	866	914	962	1010				
模组 重量 (kg)	A1	4.6	5.2	5.8	6.3	6.9	7.4	8	8.5	9.1	9.7	10.2	10.8	11.3	11.9	12.4	13	13.6
	B1	5.4	6	6.4	7.1	7.7	8.2	8.8	9.3	9.9	10.5	11	11.6	12.1	12.7	13.2		
	C1	6.2	6.8	7.2	7.9	8.5	9	9.6	10.1	10.7	11.3	11.8	12.4	12.9				
运动 体总 质量 (kg)	A1	1.8																
	B1	2.6																
	C1	3.4																
定制 模组 最大 行程 (mm)	A1	2328																
	B1	2242																
	C1	2160																